


General Dosing Equipment & Accessories

Acid Dilutor System

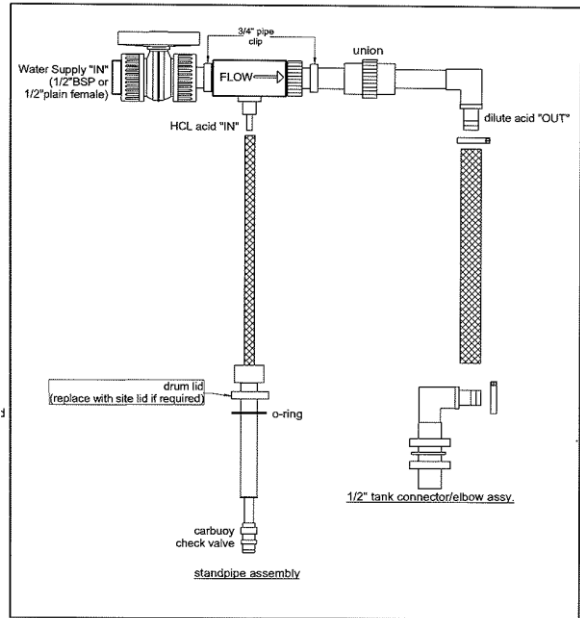

Code: Acid Dilutor Kit

9-AD

Designed for dilution of hydrochloric acid with water to solution strength of 3-10% for the filling of day tanks. Supplied complete with acid drum suction lance, hoses, hose clips & installation instruction.



Code: Spring Loaded Safety Isolating Valve

G0080

Ideal for bulk tank installations to prevent unmanned filling of day tanks. 1" uPVC solvent socket union connections. (PTFE valve seats and FPM elastomers/o-rings)



Code: Motorised diaphragm valve

G0100

- Insensitive to particulate media
- Corrosion resistant
- Optical position indicator
- 0.3 s operating time

0-6 bar, uPVC body, EPDM elastomers, 10 to 60 deg.C, IP65
M12 5-pin plug electrical connection, 1.9A

Available in 24Vdc, 24Vac, 110Vac and 230Vac

321-207/5-5P


M12 x 5pin signal control cable, 5m length



Code: Tundishes (AA type air gap devices) required for compliance with Water Regulations when filling chemical day tanks.

**17-STDISH
17-ATDSIH**

22mm x 1" BSPf plastic tundish inc. nut & olive
3/4" BSPm x 1" BSPf angled plastic tundish



Code: In-Line Water Flow Controllers.

Ideal for fitting to pool top-up supplies or dilution waste streams for continuous control of the filling/bleed rate in pools/spas.

**19-FC-24
19-FC-38
19-FC-48
19-FC-60
19-FC-120**

24 lph preset valve, 1/2" BSPf
38 lph preset valve, 1/2" BSPf
48 lph preset valve, 1/2" BSPf
60 lph preset valve, 1/2" BSPf
120 lph preset valve, 1/2" BSPf